


S2D Microwave, Inc. offers broad band BiasTee with very low loss and high current rating ideal to bias any RF circuit.



Electrical Specifications

Frequency	0.2 to 20 GHz
Insertion Loss	1 dB Max
RF to Bias Port Isolation	30 dB Typ
VSWR	1.3 dB
Impedance	50 Ohm
DC Voltage	30 V
Current	900 mA
RF Power Handling	5 W Max

Mechanical Specifications

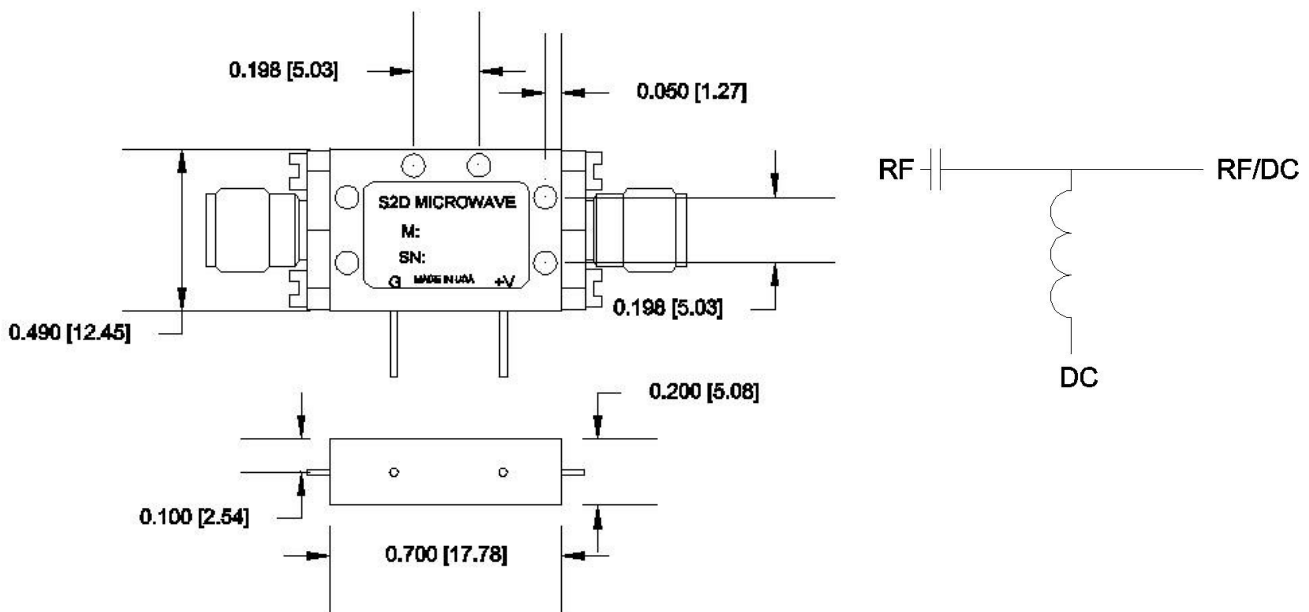


Operating Temperature: -55 °C to +125 °C
 Plating: Gold Plated

Ground and Bias connector - solder pins
 Material Connector: Passivated stainless steel
 Material Contacts: Gold plated BeCu
 Mounting holes dia. 70 mil X 6 places

S2D Microwave, Inc. reserves all the rights to change any specification without notice. Contact S2D Microwave, Inc. for the most recent specifications.

Typical Performance

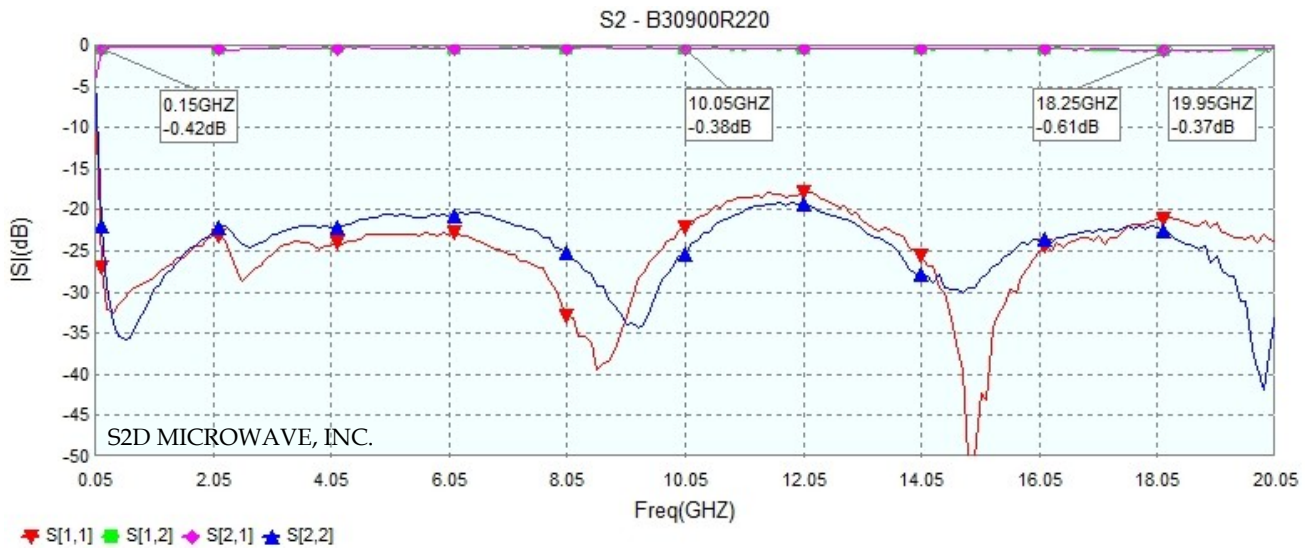

S2D Microwave, Inc. reserves all the rights to change any specification without notice. Contact S2D Microwave, Inc. for the most recent specifications.