


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED
	A	INITIAL RELEASE	06/29/12	

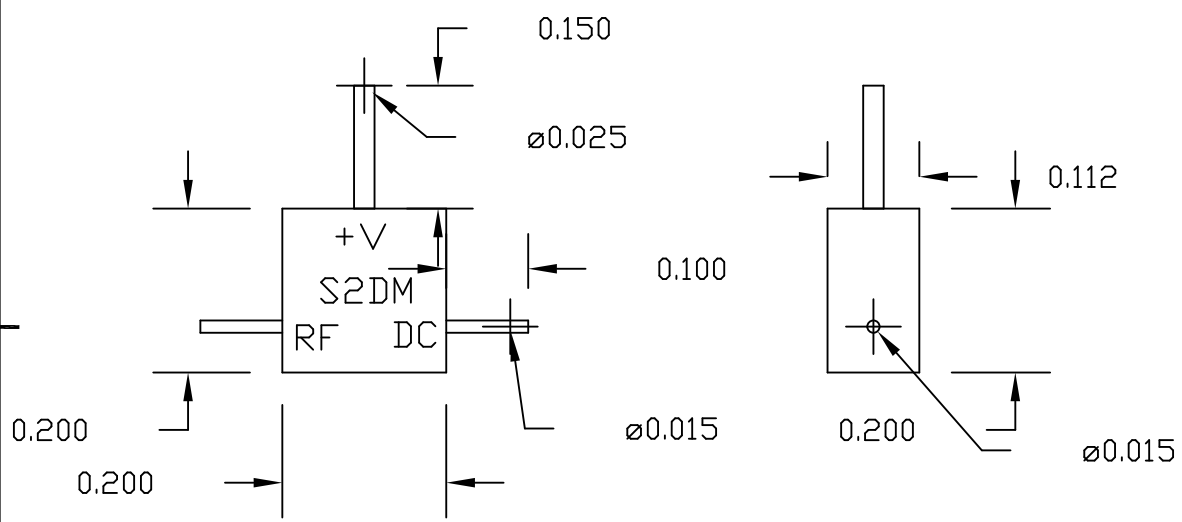

**SPECIFICATIONS:**

- Frequency: ..... 0.4 GHz to 7 GHz
- VSWR: ..... 1.5:1 max
- Insertion loss : ..... Typical 0.5 dB
- Input/Output port: ..... Solderable Pin
- DC Voltage..... 30V
- DC Current : ..... 600mA
- Bias connector : ..... Solderable Pin
- Impedance: ..... 50 Ohm
- RF Power: ..... 3W
- Operating temperature - ..... - 40 to +85Deg C

All Dimensions in Inches Tolerances: Fractions   Decimals   Angles - $\pm 0.01$ $\pm 3^\circ$ $\pm 0.005$	
Model# S0B_30600R47	
Material: AL Alloy 6061-T6 per QQ-A-250/11	Plating: ANODIZING



**BIAS TEE**

SIZE	FSCM NO.	DWG NO. 100-612-B-01	REV
SCALE: None		SHEET 1 of 1	