


S2-01R55R520

S2D Microwave, Inc. offers broad band, high performance RF Microwave pin diode switches. S2-0155R520 is high performance 500 MHz to 20 GHz reflective design with low insertion loss of 2.0 dB max. The switch is packaged in a gold plated housing.

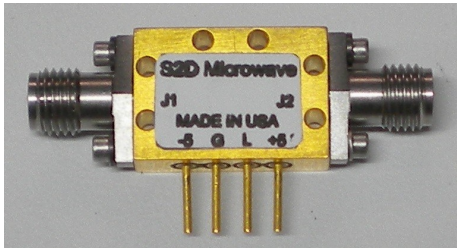

Applications

- Military Radar, Radio and ECM
- Test Instrumentation
- Telecom Infrastructure
- Microwave Radio & VSAT


Electrical Specifications

Frequency	0.5 to 20 GHz
Insertion Loss	2 dB Max
Isolation	65 dB min
VSWR	1.7 dB max
Impedance	50 Ohm
Bias Voltage	+5@20mA -5@40mA
Switching Speed	30 nsec Typ
RF Power Handling	20 dBm Max

Control

- TTL Logic 0: Low Loss
- TTL Logic 1: Isolation

Mechanical Specifications

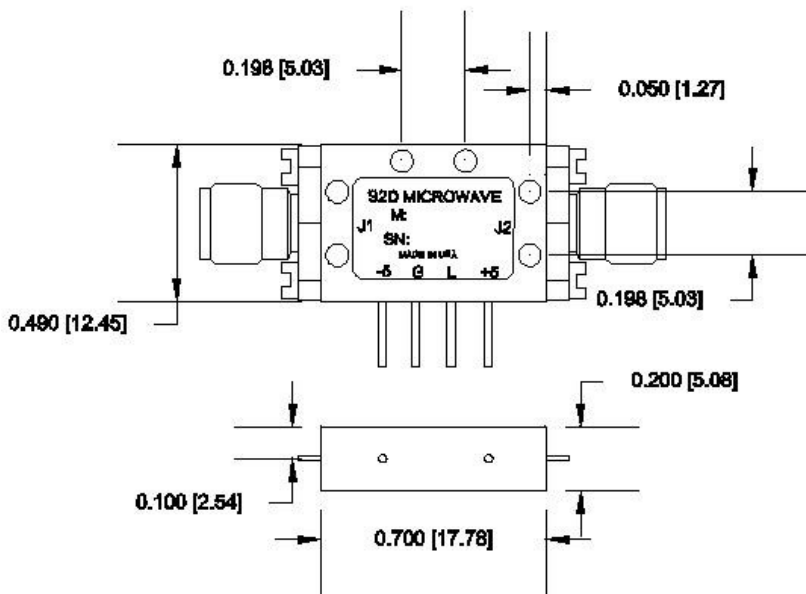

Ground and Bias connector - solder pins

Material Connector: Passivated stainless steel

Material Contacts: Gold plated BeCu

Connector: Removable SMA(F) X 2



Mounting holes DIA 70 mil X 6 places

Operating Temperature: -55 °C to +85 °C

Plating: Gold Plated

S2D Microwave, Inc. reserves all the rights to change any specification without notice. Contact S2D Microwave, Inc. for the most recent specifications.

Typical Performance

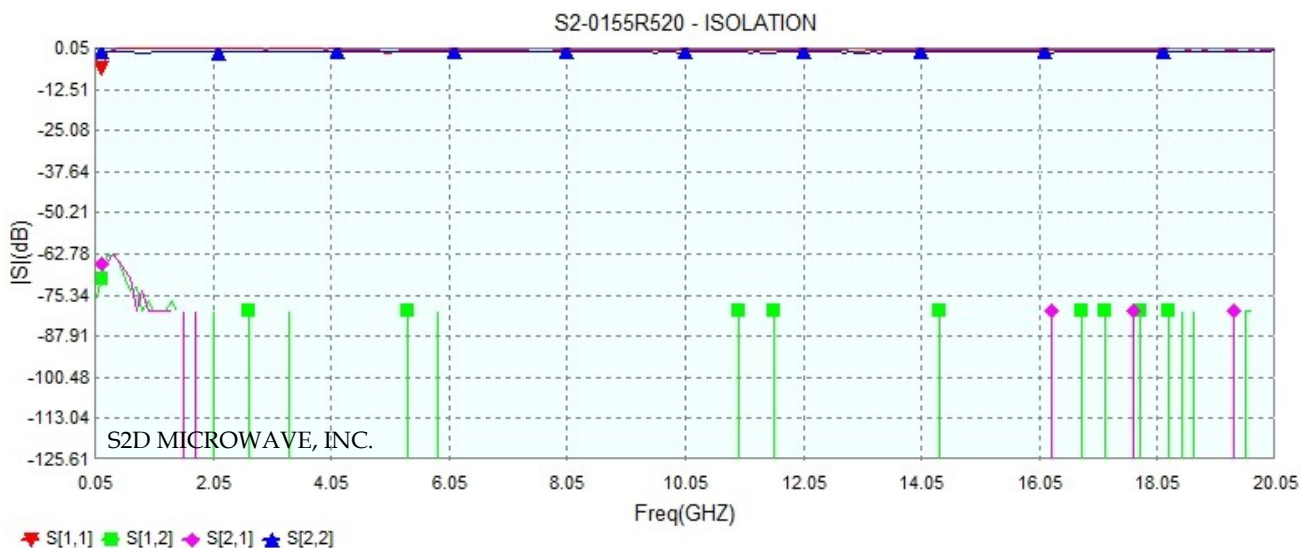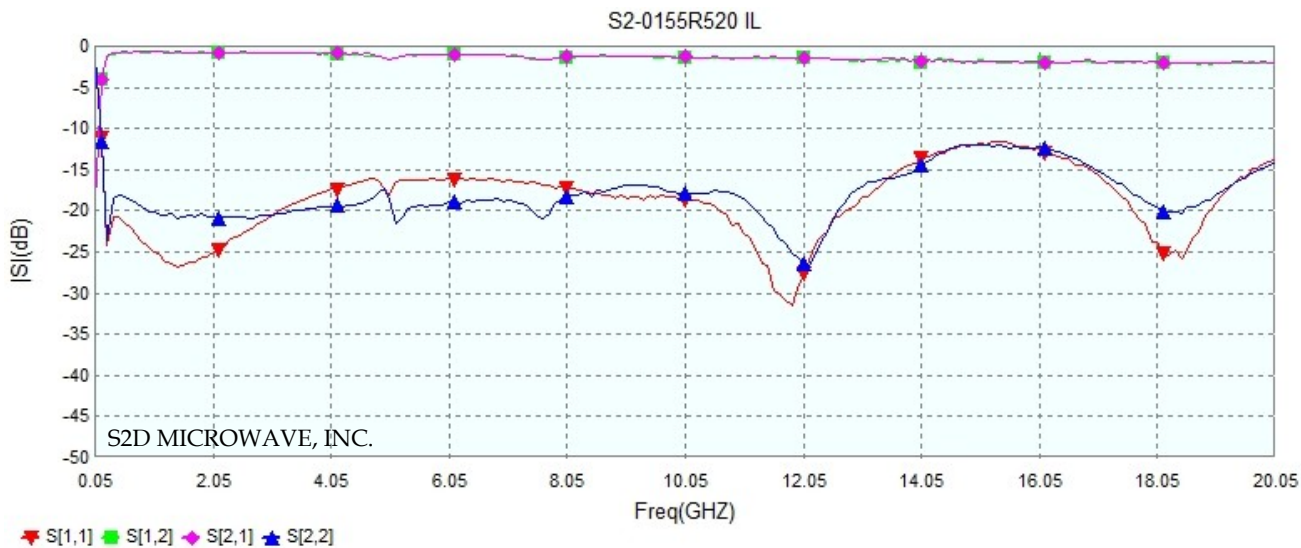

S2D Microwave, Inc. reserves all the rights to change any specification without notice. Contact S2D Microwave, Inc. for the most recent specifications.